


SHARP / NEC

NEC MultiSync® UN552A

LCD 55" Video Wall Display

Datasheet

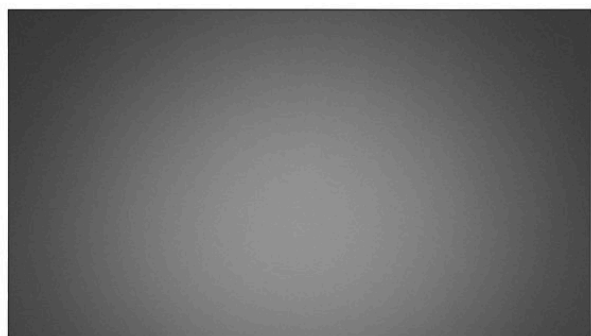

The game changer for situational awareness

The ideal canvas for state of the art visualisation of mission-critical information, the NEC MultiSync® UN552A display is a game changer for LCD video walls. Designed for control rooms, the display supports situational awareness for traffic management in airports, railway and road networks, plus control applications in the energy, utility and environmental sector. For Big Data analytics, which is experiencing phenomenal growth in volume, speed and variance, this display is ideally placed to provide perfect visualisation.

The new display is optimised for static and moving content. With 700cd/m² brightness and an anti-reflection haze filter, these screens are easy to read, even in bright environments. Installation and operation is a breeze and with powerful calibration capabilities, initial setup requires minimal effort whilst long-term colour and brightness is maintained with remarkable homogeneity. The screen's design forms a flat digital canvas creating one continuous image across multiple screens.

Benefits

Easy to install – it's simple to get your display up and running with its out-of-the-box calibrated picture pre-sets, managing colour settings and uniformity controlled by the SpectraView Engine — not to mention its simple, software-free calibration capabilities.

Reliable image reproduction – best suited for static image reproduction with reliable accuracy in mission critical applications. Our PVA panel technology makes sure you have the best viewing experience with excellent contrast and black level.

Accelerate your video wall configuration – set up your wall in no time with the display's powerful configuration capabilities, which include Auto ID/IP, Auto Tile Matrix, and Tile-/Frame Compensation. Enjoy flawless playback across your entire video wall.

Future Ready with Open Modular Intelligence Expansion – upgrade the power of your display at any time by seamlessly integrating one of NEC's options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.

Safe and secure displays – each display is EMC class-B certified and ideally suited for critical emission environments that require safer standards than other displays do.

Product Information

Product Name	NEC MultiSync® UN552A
Product Group	LCD 55" Video Wall Display
Order Code	60004525

Display

Panel Technology	VA with Direct LED backlights
Active Screen Area (W x H) [mm]	1,209.6 x 680.4
Screen Size [inch/cm]	55 / 138.8
Aspect Ratio	16:9
Pixel Pitch [mm]	0.630
Brightness [cd/m²]	700
Contrast Ratio (typ.)	4000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Gamut	72% of NTSC
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (25)
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

Resolution

Native Resolution	1920 x 1080			
Supported on DisplayPort and HDMI	1024 x 768; 1080i; 1080p;	1280 x 1024; 1280 x 768; 1360 x 768;	1600 x 1200; 1920 x 1080; 3840 x 2160;	640 x 480; 720p (50/60 Hz); 800 x 600

Connectivity

Input Video Analogue	1 x VGA; Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x Remote Control (3.5 mm jack); 1 x RS232; 2 x LAN 100Mbit
Input Data	1 x microSD (MediaPlayer); 1 x USB 1.0 (Downstream); 1 x USB 1.0 (Media Player); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, MediaPlayer)
Output Audio Analogue	3,5mm jack
Output Control	LAN 100Mbit

Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSVSensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; Update Uniformity Correction; White Point

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	3.6 / 58
Compute Module Slot	Slot Technology: Compute Module 3 Slot (NEC proprietary standard)

Sensors

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption Eco/max. [W]	195 shipping; 440 (max.)
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,213.5 x 684.3 x 100.3
Weight [kg]	Without stand: 28.5
Bezel Width [mm]	1.2 bottom/right; 2.3 top/left; 3.5
VESA Mounting [mm]	4 holes; 400 x 400 (FDMI); M6

MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

Available Options

Accessories	Calibration kit (KT-LFD-CC2); Feet (ST-5220); Overframe kit (KT-55UN-OF2); Remote control kit (KT-RC3); Speaker (SP-TF1); Wall mount (PD04VW MFS 46-55 L/P; PD04VW QR 46-55 L/P; CK02XUN MFS 55 L/P; CK0XUN551S MFS 55 L/P)
Compute Module Slot	Raspberry Pi Compute Module 1 and 3
OPS Slot	Intel® Atom, Celeron and Core i3, i5, i7 Slot-in PCs

Green Features

Energy Efficiency	Carbon savings meter; Energy consumption: 188 kWh/1000 h; Energy efficiency class: G; Human Sensor; LED backlight
-------------------	---

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; PJLink Support; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; UL/C-UL; VCCI
Pixel Failure Class	ISO 9241-307, Class 2
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; LAN cable (RJ45); Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension ¹
Operating Hours	24/7

¹ please refer to terms and conditions of warranty extensions



CE



RCM



VCCI



RoHS



TÜV GS

This document is © 2021 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 29.12.2021