



# COMPACT TENSIONED

**COMPACT TENSIONED** is a motorized screen with a peculiar tensioning system on each side of it, that guarantees the perfect flatness of the fabric.

This product has been specifically studied for the niche of Home Theatre market.

For this reason, it is the right solution for the most particular and demanding requests.

It is available in 4:3 and 16:9 ratios and it is equipped with black side edges, a black extra drop and Matte White fabric in order to give the best projection performance.




- Silent motor system provides a smooth and quiet operation
- Totally manufactured in aluminium
- Smart design and easy to install
- Housing dimensions: 94x112 mm.
- Housing painted with white epoxy powders (RAL 9010)
- Two universal mounting brackets either for ceiling or for wall included
- On/off switcher included
- Projection fabrics are flame-retardant-classification M1 and B1
- Side black borders of 5 cm. (in the narrowest point), black drop of 30 cm. on the top and black dowel bar: height 35 mm. - depth 20 mm.
- Tensioning system on both sides
- **AVAILABLE ACCESSORIES:** RF remote control with integrated or external receiver, False ceiling Trim Kit, Interface switch 12 Volt, Low voltage contact interface, Wall extension brackets
- **OPTIONAL MOTOR:** faster and quiet motor - Nm 9 - Rpm 28

## TECHNICAL SPECIFICATIONS


4:3 Ratio Viewing area (WxH)-(A)	16:9 Ratio Viewing area (WxH)-(A)	16:10 Ratio Viewing area (WxH)-(A)	Overall dimensions	Front projection surfaces	Approx. net weight
cm. 160x120 cm. 180x135 cm. 200x150 cm. 220x165 cm. 250x190	cm. 160x90 cm. 180x101 cm. 200x112 cm. 220x124 cm. 250x140	cm. 160x100 cm. 180x112 cm. 200x125 cm. 220x137 cm. 250x156	B cm. 198 C cm. 193 B cm. 218 C cm. 213 B cm. 238 C cm. 233 B cm. 258 C cm. 253 B cm. 288 C cm. 283	Matte White gain 1.2 Microperforated gain 1.1 Lumi Grey gain 0.8 Lumi Grey Microperforated gain 0.8 Cinesound gain 0.7	Kg. 15 Kg. 17 Kg. 19 Kg. 20 Kg. 22

\* Warranty: 5 years on the motor - 24 months on the other components


# TECHNICAL SPECIFICATIONS

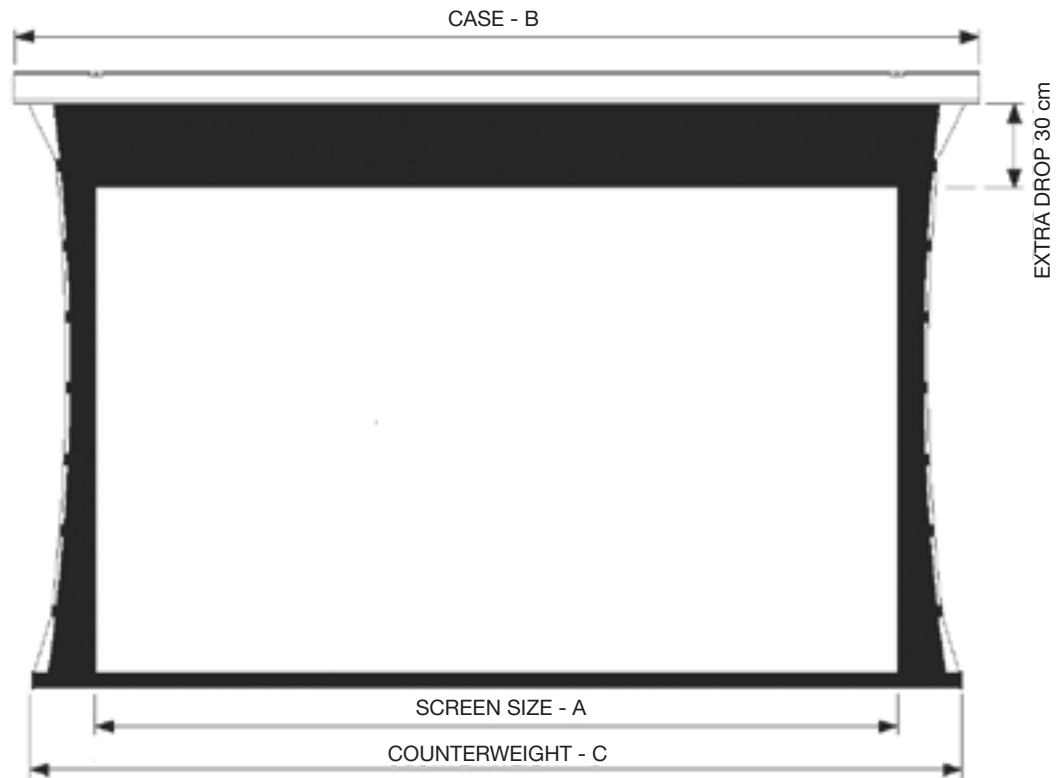


Concealing counterweight

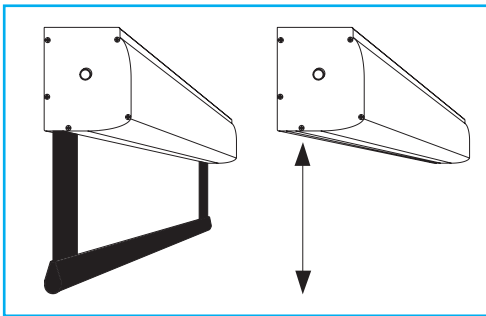


Cabinet dimensions

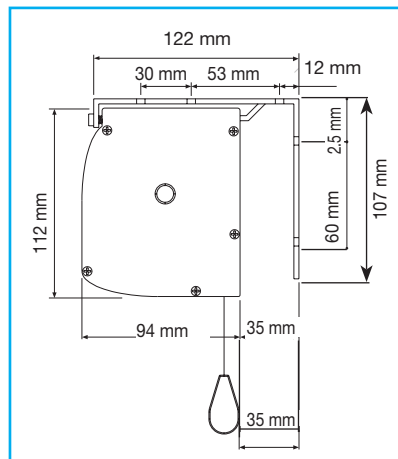


Cloth drops on the front side of the housing (optional)

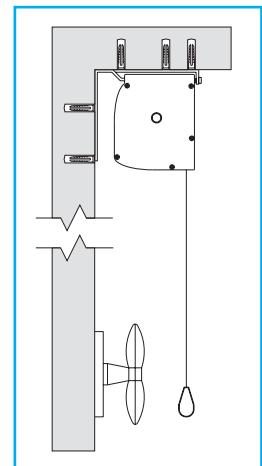

Wall Mounting



Ceiling Mounting



## Motor characteristics

**Power:** 6 Nm  
**Speed:** 17 rpm  
**Power supply:** 230V / 50 Hz  
**Consumption:** 137 W  
**Certification:** IMQ

Euroscreen S.r.l.  
 Via Stiria, 45/16 - 33100 Udine - Italy  
 Tel. +39 0432 522755  
 Fax +39 0432 524000  
 www.screenint.com  
 info@screenint.com

