

JUST PROJECTORS

360°




UTO OF

24

# optoma.co.uk

# ZW350

Compact high brightness laser projector

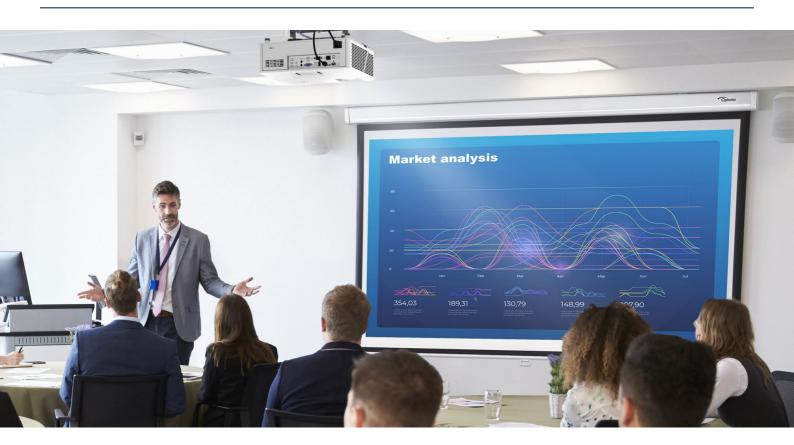

- Bright WXGA DuraCore laser projector 3500 lumens and IP6X certified
- Easy installation 1.3x zoom, 360-degree and portrait projection
- Ultimate control Crestron, Extron, AMX, PJ-Link and Telnet LAN commands
- DuraCore laser technology 30,000 hours maintenance-free laser light source



The ZW350 is a compact WXGA DuraCore IP6X laser projector. Designed for maintenance-free continuous operation, it can be installed in virtually any orientation. Its small and lightweight footprint and 1.3x zoom combined with 360-degree and portrait projection make it easy to install.

This feature-packed projector has a built-in speaker and its laser technology delivers up to 30,000 hours of maintenance-free laser light source. For ultimate control, it comes with an RJ45 connection for monitoring and controlling a network across multiple rooms.



### JUST PROJECTORS





## **Specifications**

Net weight

Specifications	
Display/image	
Display technology	DLPTM
Resolution	WXGA (1280x800)
Brightness	3,500 lumens
Contrast ratio	300,000:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9
Keystone correction - vertical	+/-40°
Has vertical auto keystone correction	Yes
Displayable colours (millions)	1073.4
Horizontal scan rate	15.375 ~ 91.146 Khz
Vertical scan rate	50 ~ 85 Hz (120Hz for 3D)Hz
Uniformity	75%
Screen size	0.76m ~ 7.65m (30.1" ~ 301") diagonal
Lamp info	
Light source type	Laser
LASER life	30,000 hours
Optical	
Throw ratio	1.18:1 ~ 1.54:1
Projection distance (m)	1m - 7.7m
Zoom	1.3
Zoom type	Manual
Focal length (mm)	16.901 ~ 21.6076
Native offset	113%
Connectivity Connections	
Connections	Inputs 2 x HDMI 1.4a 3D support, 1 x VGA (YPbPr/RGB), 1
	x Audio 3.5mm
	Outputs 1 x Audio 3.5mm, 1 x USB-A power 1.5A
	<b>Control</b> 1 x RS232, 1 x RJ45, 1 x micro USB service
General	
Noise level (typical)	30dB
Noise level (max)	32dB
PC compatibility	FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
2D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)
3D compatibility	Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60
3D	Full 3D
Security	Security bar, Kensington Lock, Password protected interface
IP rating	IP6X
OSD / display languages	25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese
24/7 operation	Yes
360° operation	Yes
Operating conditions	5°C ~ 40°C, Max. Humidity 85%, Max. Altitude 3000m
Remote control	Data remote with laser and mouse function
Speaker count	1
Watts per speaker	15W
In the box	AC power cord Remote control 2x AAA batteries
	Basic user manual
Optional wireless models	UHDCast Pro
Networking	
LAN - control	Yes
Power	
Power supply	100V ~ 240V, 50-60Hz
Power consumption (standby)	<0.5W
Power consumption (min)	138W
Power consumption (max)	161W
Weight and dimensions	
Dimensions (W x D x H) mm	337 x 265 x 122.5
Gross weight	6.2 kg
Netweight	- 4 ka

4 kg

Copyright © 2021, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 29092021051727